


Eastto

Concrete Form Oil

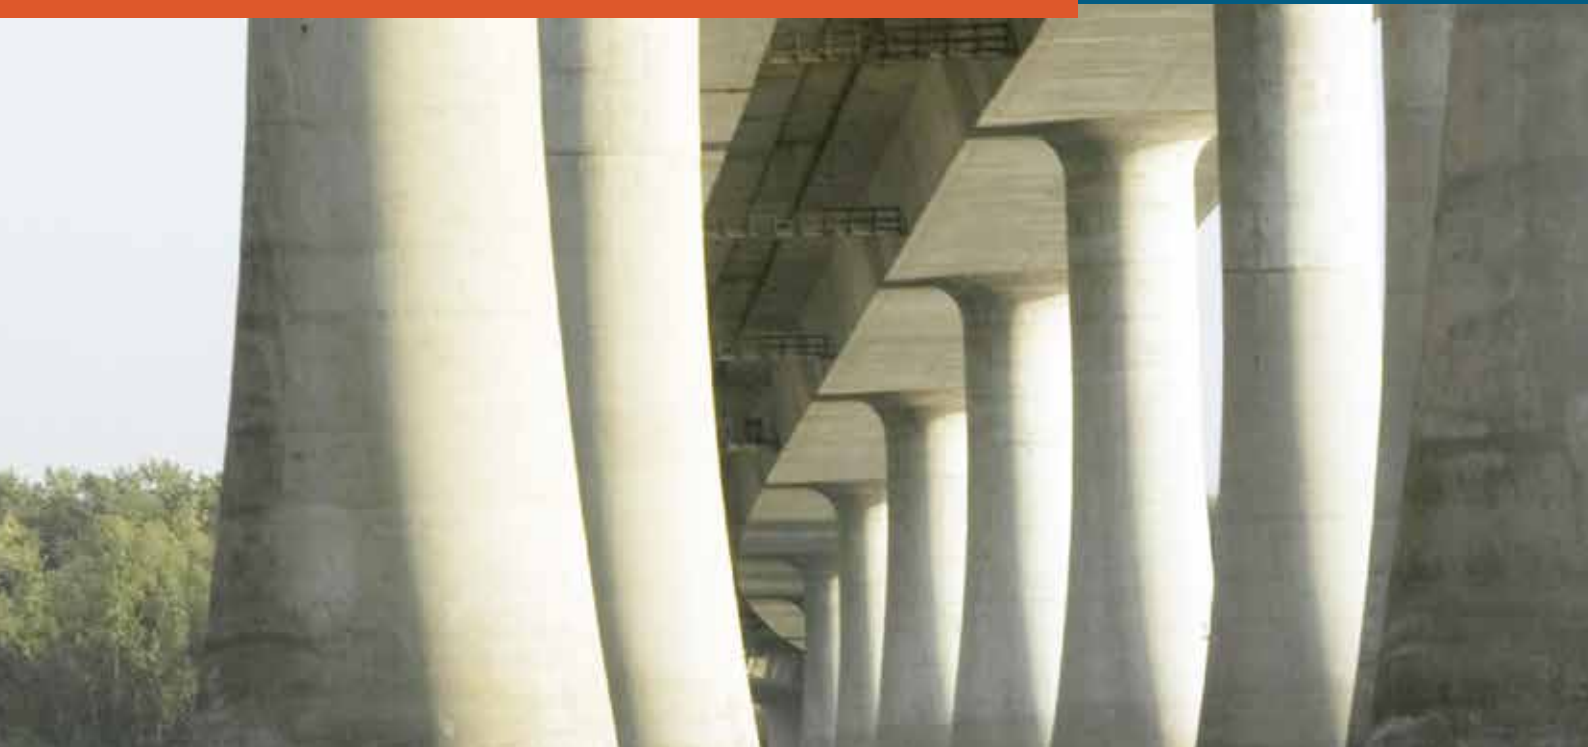

Eastern Petroleum Private Limited

an ISO 9001-2008 certified company

Eastto Concrete Form Oil

Introduction:

Eastto Concrete Form Oil typically used as a material to prevent concrete forms from sticking or adhering to hardened concrete. The product contains proprietary ingredients blended with select base oils that combine with reactive materials in the concrete to provide a minute film which prevents bonding of the surfaces.

Application:

Recommended for use where ultra-finish surfaces are required such as in formation of sleepers, pipes and astatically designed structures.

Typical Properties:

CHARACTERISTICS	MOULD OIL
Appearance	Clear Liquid
Density at 29.5 degree	.861
Kinematic Viscosity at 40°C., cSt,	12
Flash Point °C	75

*To store in dry place, flammable to be used in well ventilated condition

Packing: 210 Litres M.S. Barrels, 20 Litres Drum



Eastern Petroleum Private Limited

Regd. Off: Unit 1, Corporate Park, Chembur, Mumbai - 400 071

T | + 91 - 22 - 4232 4121 / 2529 9990 F | + 91 - 22 - 2524 1895.

E | office@easternpetroleum.in

W | www.eastto.in

